

CATEGORY

RESTRICTORS

WARDON WORLD Class

DEFENDER CAVITY FIT RESTRICTOR

TYPE
STANDARD DUTY RESTRICTOR
BENEFIT

The ultimate solution to resident safety

- Tested to BS 6375-2 to load bearing capacity of safety devices
- Austenitic 304* stainless steel for enhanced corrosion resistance
- Compatible with all Securistyle standard duty hinges including the Defender Egress Easy Clean
- 12 year guarantee (details available upon request)







▲ RESTRICTOR mechanism limits maximum opening




▲ CAVITY LOCATOR PI for each standard cavity height

austenitic 304

Securistyle

Kingsmead Industrial Estate, Princess Elizabeth Way Cheltenham, Gloucestershire GL51 7RE, UK

Rev 3 - January 2014 - ©



Tel: +44 (0) 1242 221200 Fax: +44 (0) 1242 228194/520828

E-mail: info@securistyle.co.uk Website: www.securistyle.co.uk


^{*} Austenitic (was 304) stainless steel to BS EN 10088-2 Grade 1.4301 for enhanced corrosion resistance



securistyle ⁷¹

WONDOW WORK (ass

PRODUCT SPECIFICATIONS

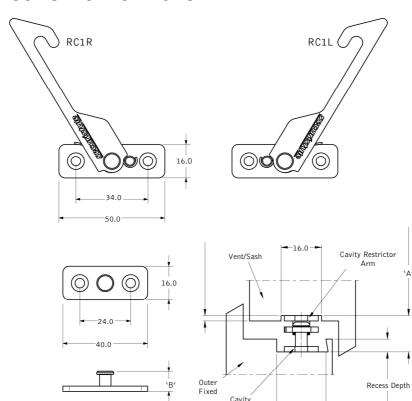

RESTRICTORS



		16.0		
Part Codes	Description	Cavity Size (Dim 'A')	Pin Height (Dim. 'B')	Boxed Quantity
SC1	13mm Locator Pin	13-14mm	9.5mm	25
SC2	16mm Locator Pin	16-17mm	13.5mm	25
SC3	17mm Locator Pin	17-18mm	14.5mm	25
SC4	13mm Locator Pin	13-14mm	11.5mm	25
RC1L	Cavity Restrictor Left Hand			25
RC1R	Cavity Restrictor Right Hand			25

austenitic 304

PRODUCT SPECIFICATION

- Easy to fit with no routing required
- Compatible with standard countersunk fixings
- Can be used on windows without reinforcement
- Available in 13mm, 16mm and 17mm cavity heights
- Left and right hand product available
- Compatible with Securistyle 16mm stack height commercial hinges: Sterling & Storm Balanced







BS EN IS09001 Cert No. Q05105

Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request

Tel: +44 (0) 1242 221200 Fax: +44 (0) 1242 228194/520828

E-mail: info@securistyle.co.uk Website: www.securistyle.co.uk

Securistyle

Kingsmead Industrial Estate, Princess Elizabeth Way Cheltenham, Gloucestershire GL51 7RE, UK

Rev 3 – January 2014 - ©

ght of