



RESTRICTOR STAYS

TYPE

PERMANENT HEAVY DUTY

RESTRICTOR

BENEFIT

Permanent restriction tested to BS6375-2

RESTRICTOR STAY




HEAVY DUTY RESTRICTOR STAYS

The Heavy Duty Restrictor Stays give an opportunity to permanently restrict opening vents, particularly useful in applications where resident safety is required or where windows open out onto corridors or gangways.

In normal operation the restrictor stay allows the vent to open until the slider engages against the opening stop in the track.

- Tested to BS6375-2 to withstand a force of 350N for one minute
- Device provides additional friction for windows
- Available in austenitic 304* stainless steel for enhanced corrosion resistance
- 12 year guarantee (details available upon request)

The Heavy Duty Restrictor Stays are designed to be fitted between two flat and parallel rigid faces that conform to the measurements shown below.

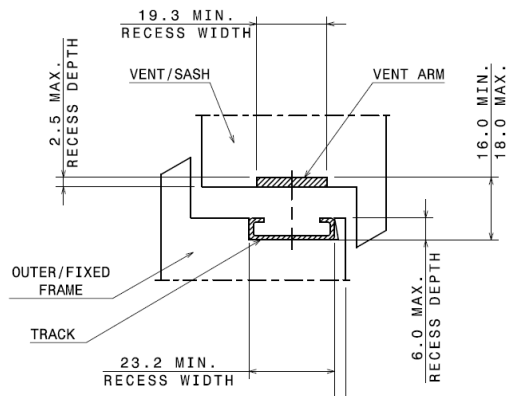

12
YEAR GUARANTEE

austenitic
304

* Austenitic (was 304) stainless steel to BS EN ISO 10088-2 Grade 1.4301 for enhanced corrosion resistance



BS EN ISO9001
Cert No. Q05105

Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request

Ref: RSHD

Securistyle

Kingsmead Industrial Estate, Princess Elizabeth Way
Cheltenham, Gloucestershire GL51 7RE, UK

Rev 6 – Jan 2014 - ©

An ASSA ABLOY Group Brand

Tel: +44 (0) 1242 221200

Fax: +44 (0) 1242 228194/520828

E-mail: info@securistyle.co.uk
Website: www.securistyle.co.uk

ASSA ABLOY